


SPAX slate screw

For roof and façade


SPAX OUTDOOR FACADE

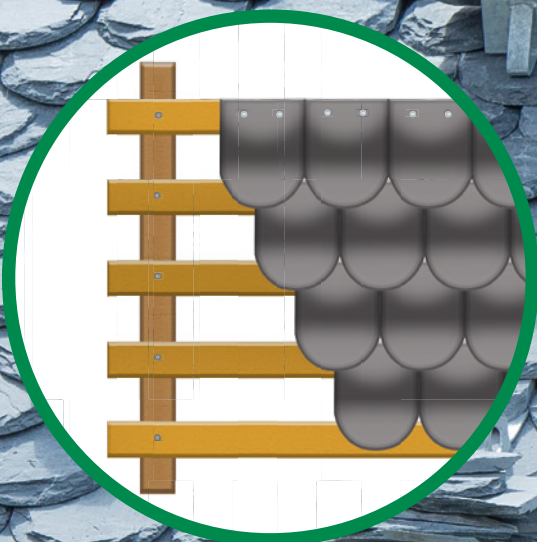

DATA SHEET



SPAX®

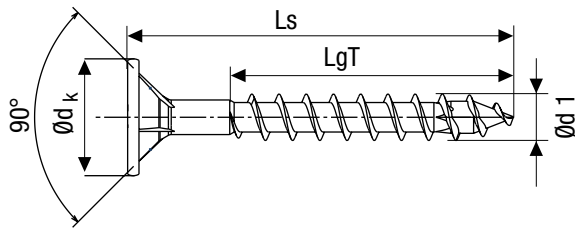

Slate screw, special flat head

T-STAR *plus*, partial thread

4CUT, milling ribs


Slide coating

Stainless steel A2 1.4567

A2
AISI 304

Dimensions [mm]				Packaging units			SPAX number	EAN code
Thread Ø	Total length	Partial thread length	Blade size	SPAX Box [piece]	Outer box [PU]	Pallet		
d1	Ls	LgT	T					
Standard packaging								
4.0 Ø dk = 10.0 mm	34	25	20	500	5,000	160,000	35704015801001	4003530258442

NEW

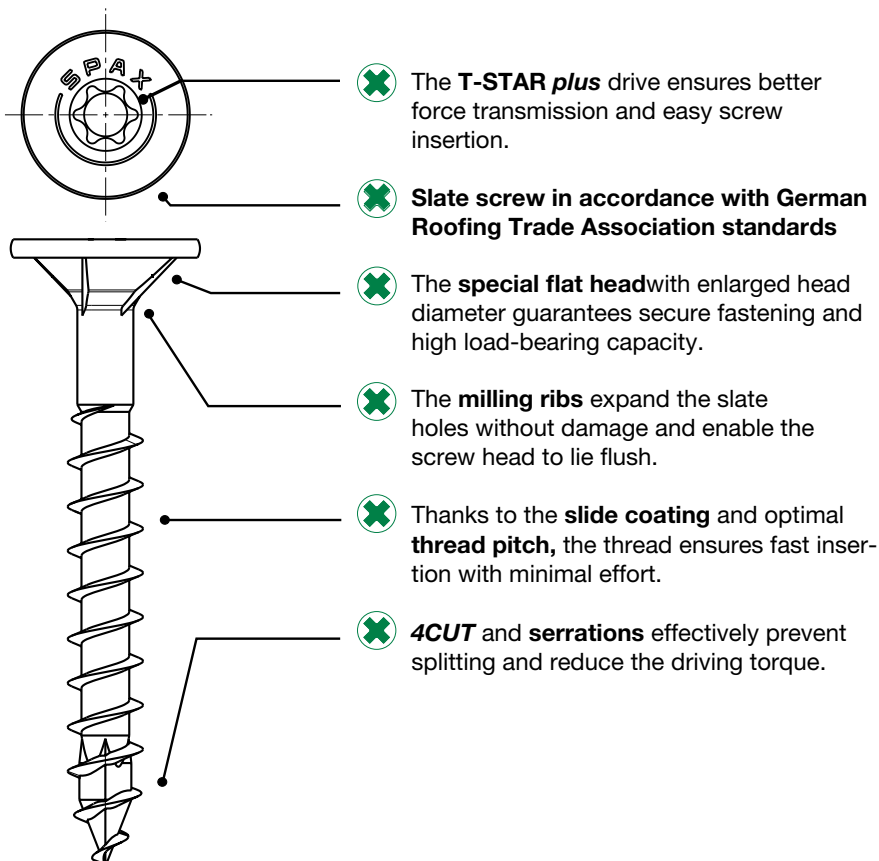

The advantages:

- Enables precise installation on complex roof and wall surfaces. Easily adjustable screw tightening practically eradicates slate breakage.
- Screwing offers significant advantages over nail fastening for elastic shuttering.
- Easy to remove and ideal for use in repairs.
- Stainless steel A2 is the perfect choice for permanent outdoor use.
- Slates are always installed with screw connection through the existing drill holes.
- Permitted for coverings on derived timber products and cement-bonded chipboard.

SPAX International GmbH & Co. KG

ALTENLOH, BRINCK & CO - GRUPPE SEIT 1823

Kölner Straße 71 – 77 · 58256 Ennepetal · Germany
Telefon: +49 2333 799-1967 · Fax: +49 2333 799-199
info@spax.com · www.spax.com

Issued 09/2020